


RELACION DIMENSIONAL Y PESOS

VALTIC HI TEMP PE-RT TYPE II

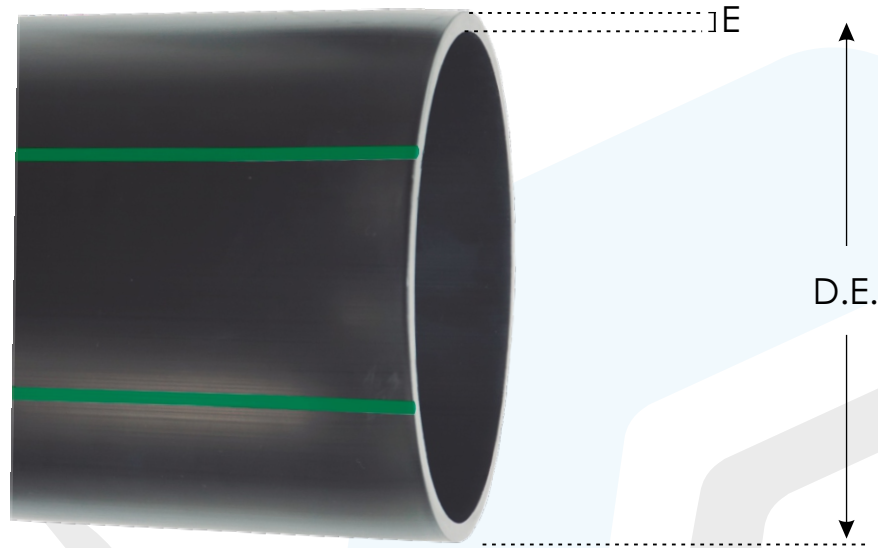

RELACION RD		RD 7.0		RD 9		RD 11		RD 13.5		RD 17		RD 21		RD 26	
Presión de Trabajo	kg/cm ² Psi	23 327		17 242		14 199		11 157		9 128		7 100		6 85	
Diámetro Nominal (Dn) (Pulg.)	Diámetro Exterior (mm)	ESPOSOR (mm)	PESO (Kg/m)	ESPOSOR (mm)	PESO (Kg/m)	ESPOSOR (mm)	PESO (Kg/m)	ESPOSOR (mm)	PESO (Kg/m)	ESPOSOR (mm)	PESO (Kg/m)	ESPOSOR (mm)	PESO (Kg/m)	ESPOSOR (mm)	PESO (Kg/m)
2"	60.3	8.6	1.40	6.7	1.13	5.5	0.95	4.5	0.79	3.6	0.64	2.9	0.52	----	----
2 1/2"	73.0	10.4	2.05	8.1	1.66	6.6	1.38	5.4	1.15	4.3	0.93	3.5	0.77	2.8	0.62
3"	88.9	12.7	3.05	9.9	2.46	8.1	2.06	6.6	1.71	5.2	1.37	4.2	1.12	3.4	0.92
4"	114.3	16.3	5.03	12.7	4.06	10.4	3.40	8.5	2.83	6.7	2.27	5.4	1.85	4.4	1.52
6"	168.3	24.0	10.91	18.7	8.81	15.3	7.37	12.5	6.14	9.9	4.94	8.0	4.04	6.5	3.31
8"	219.1	31.3	18.52	24.3	14.91	19.9	12.49	16.2	10.35	12.9	8.38	10.4	6.84	8.4	5.58
10"	273.1	39.0	28.76	30.3	23.18	24.8	19.40	20.2	16.09	16.1	13.03	13.0	10.65	10.5	8.69
12"	323.8	46.3	40.48	36.0	32.64	29.4	27.27	24.0	22.67	19.1	18.33	15.4	14.96	12.5	12.26
14"	355.6	50.8	48.78	39.5	39.33	32.3	32.90	26.3	27.28	20.9	22.04	16.9	18.03	13.7	14.76
16"	406.4	58.1	63.42	45.2	51.43	37.0	43.06	30.1	35.68	23.9	28.80	19.4	23.65	15.6	19.21
18"	457.2	----	----	----	----	41.6	54.46	33.9	45.21	26.9	36.46	21.8	29.90	17.6	24.37
20"	508.0	----	----	----	----	46.2	67.21	37.6	55.72	29.9	45.03	24.2	36.88	19.5	30.01
22"	558.8	----	----	----	----	----	----	41.4	67.48	32.9	54.51	26.6	44.60	21.5	36.39
24"	609.6	----	----	----	----	----	----	45.2	80.37	35.9	64.88	29.0	53.04	23.4	43.21
26"	660.4	----	----	----	----	----	----	----	----	38.8	75.98	31.4	62.22	25.4	50.81
28"	711.2	----	----	----	----	----	----	----	----	41.8	88.15	33.9	72.33	27.4	59.02
30"	762.0	----	----	----	----	----	----	----	----	44.8	101.22	36.3	82.99	29.3	67.63
32"	812.8	----	----	----	----	----	----	----	----	----	----	38.7	94.37	31.3	77.06
34"	863.6	----	----	----	----	----	----	----	----	----	----	41.1	106.49	33.2	86.85
36"	914.4	----	----	----	----	----	----	----	----	----	----	43.5	119.34	35.2	97.49
40"	1016.0	----	----	----	----	----	----	----	----	----	----	----	----	39.1	120.33
42"	1066.8	----	----	----	----	----	----	----	----	----	----	----	----	41.0	132.49
48"	1219.2	----	----	----	----	----	----	----	----	----	----	----	----	46.9	173.20